




MAGIC
absorbing your needs

Technical Data Sheet

Product Name: Bondpad3 - BPWAG30W

Structure: EMBOSSED

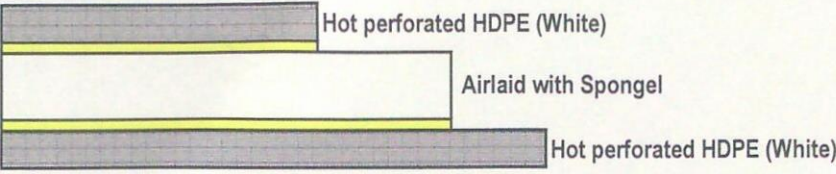

Laminated product by hot melt technology

Characteristic	Unit	Method	Min	Mean *	Max
Grammage	gr/m2	M.I.P.1	148	165	182
Absorption in solution NaCl 0,2%	gr/m2	M.I.A.10	1980		
Thickness	mm	EN 29073		1,46	
Tensile strenght - Dry MD	N/50mm	ISO 9073 - 3		n.r.	
Tensile strenght - Dry CD	N/50mm	ISO 9073 - 3		n.r.	
Elongation at max. force - Dry MD	%	ISO 9073 - 3		n.r.	
Elongation at max. force - Dry CD	%	ISO 9073 - 3		n.r.	

* where not specified, tolerance +/- 10%

Law requirements
 ABSORBING PAD SUITABLE FOR FOOD CONTACT REFERRING TO REG 1935/2004 AND 2023/2006

MAGIC CAN ASSURE THE PERFORMANCE OF THE PRODUCT UNTIL 12 MONTHS FROM THE DATE OF SHIPMENT IF:
 - STORED IN A DRY AND FRESH ATMOSPHERE (HUMIDITY 40-70%) AT AMBIENT TEMPERATURE (5-30°C)
 - STORED FAR FROM SOURCE OF HEAT AVOIDING DIRECT EXPOSURE IN THE LIGHT OF THE SUN

Date: 22/02/2021
 Rev: 0


Issued by: *Alberto Spengo*
 Quality Lab Manager Magic s.r.l.



Technical Data Sheet

Product Name: Bondpad3 - BPWAG18W

Structure: EMBOSSED

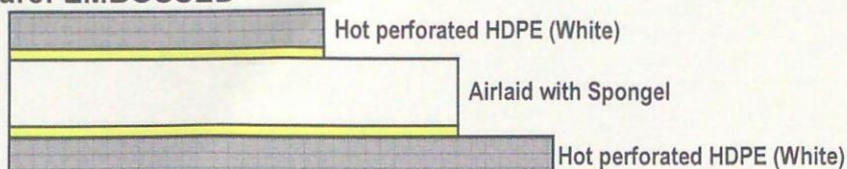

Laminated product by hot melt technology

Characteristic	Unit	Method	Min	Mean *	Max
Grammage	gr/m ²	M.I.P.1	103	115	127
Absorption in solution NaCl 0,2%	gr/m ²	M.I.A.10	1620		
Thickness	mm	EN 29073		1,13	
Tensile strenght - Dry MD	N/50mm	ISO 9073 - 3		n.r.	
Tensile strenght - Dry CD	N/50mm	ISO 9073 - 3		n.r.	
Elongation at max. force - Dry MD	%	ISO 9073 - 3		n.r.	
Elongation at max. force - Dry CD	%	ISO 9073 - 3		n.r.	

* where not specified, tolerance +/- 10%

Law requirements

ABSORBING PAD SUITABLE FOR FOOD CONTACT REFERRING TO REG 1935/2004 AND 2023/2006

MAGIC CAN ASSURE THE PERFORMANCE OF THE PRODUCT UNTIL 12 MONTHS FROM THE DATE OF SHIPMENT IF:

- STORED IN A DRY AND FRESH ATMOSPHERE (HUMIDITY 40-70%) AT AMBIENT TEMPERATURE (5-30°C)
- STORED FAR FROM SOURCE OF HEAT AVOIDING DIRECT EXPOSURE IN THE LIGHT OF THE SUN


Date: 17/02/2021
Rev: 0

Issued by: *Alberto Spengo*
Quality Lab Manager Magic s.r.l.

Technical Data Sheet

Product Name: Bondpad3 - BPWAG45W

Structure: EMBOSSED

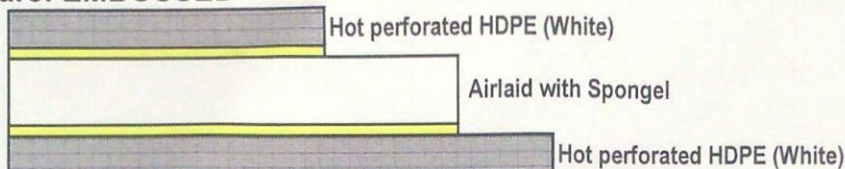

Laminated product by hot melt technology

Characteristic	Unit	Method	Min	Mean *	Max
Grammage	gr/m ²	M.I.P.1	184	205	226
Absorption in solution NaCl 0,2%	gr/m ²	M.I.A.10	3060		
Thickness	mm	EN 29073		1,98	
Tensile strenght - Dry MD	N/50mm	ISO 9073 - 3		n.r.	
Tensile strenght - Dry CD	N/50mm	ISO 9073 - 3		n.r.	
Elongation at max. force - Dry MD	%	ISO 9073 - 3		n.r.	
Elongation at max. force - Dry CD	%	ISO 9073 - 3		n.r.	

* where not specified, tolerance +/- 10%

Law requirements

ABSORBING PAD SUITABLE FOR FOOD CONTACT REFERRING TO REG 1935/2004 AND 2023/2006

MAGIC CAN ASSURE THE PERFORMANCE OF THE PRODUCT UNTIL 12 MONTHS FROM THE DATE OF SHIPMENT IF:

- STORED IN A DRY AND FRESH ATMOSPHERE (HUMIDITY 40-70%) AT AMBIENT TEMPERATURE (5-30°C)
- STORED FAR FROM SOURCE OF HEAT AVOIDING DIRECT EXPOSURE IN THE LIGHT OF THE SUN

Date: 22/02/2021
Rev: 0

Issued by: *Alberto Spengo*
Quality Lab Manager Magic s.r.l.